


0.55kW 1.1kW

Commercial Door Operators

■ German Engineering, built to last.

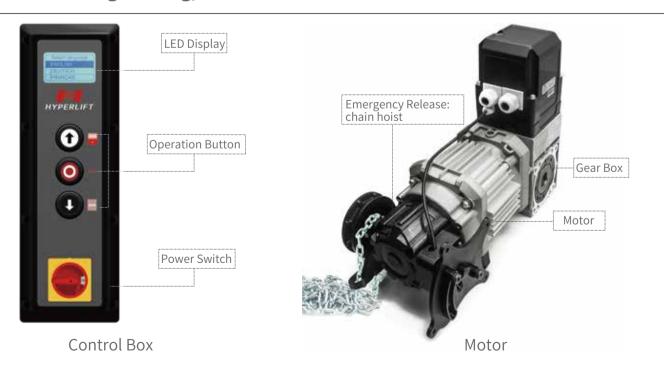

Advanced and powerfull industrial door operator

- Accurate limit setting by encoder
- Automatic closing by timer or passing through the photocell
- Multiple safety inputs for safety-edges, lightcurtains, photocells, radars and loop detectors etc.
- Traffic light function
- Clear text display for easy programming
- Service indicator for setting the number of maximum door-cycles until next service
- Clear text failure messages
- Multiple language display, 6 languages available
- · Main switch as standard
- Multiple inputs for pull switches, key switches etc.
- 3 programmable relays outputs

Sectional Door Operators		
Application	Sectional door	
HYPERLIFT-model	HL100-ISD-S	HL140-ISD-S
Motor power in KW	0.55	1.1
Torque in Nm	100	140
Speed in RPM	30	
Frequency converter	No	
Force supervision	No	
Diameter hollow shaft in mm	25.44	
Endurance	35 c/h	
Emergency release	chain hoist	
Limit setting of door travel	digital encoder	
Force of mechanical brake	No	
Max door area	≤28 m²	≤49㎡